

PATENT APPLICATION TRANSMITTAL LETTER  
(Small Entity)

Docket No.  
Q858-E

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

JOHN E. BENNETT and WILLIS C. BRADLEY

For: ADJUSTABLE HINGES FOR ORTHOPEDIC SPLINTS

Enclosed are:

- ☒ Certificate of Mailing with Express Mail Mailing Label No. EL359148937US
- ☒ Four (4) informal sheets of drawings.
- ☐ A certified copy of a \_\_\_\_\_ application.
- ☒ Declaration ☒ Signed. ☐ Unsigned.
- ☒ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☒ Two (2) signed Verified Statement(s) to Establish Small Entity Status Under 37 C.F.R. 1.9 and 1.27.
- ☒ Other: Patent Assignment, Patent Cover Sheet

CLAIMS AS FILED


For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	26	- 20 =	6	x \$9.00	\$54.00
Indep. Claims	4	- 3 =	1	x \$39.00	\$39.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$345.00
TOTAL FILING FEE					\$438.00

- ☒ A check in the amount of \$438.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 02-1731 as described below. A duplicate copy of this sheet is enclosed.
  - ☐ Charge the amount of \_\_\_\_\_ as filing fee.
  - ☒ Credit any overpayment.
  - ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
  - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: September 18, 2000

  
Signature  
Natan Epstein  
Reg. No. 28,997  
BEEHLER & PAVITT  
100 Corporate Pointe, Suite 330  
Culver City, CA 90230  
Tel. (310) 215-3183

CC:

<b>CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)</b> Applicant(s): <b>JOHN E. BENNETT and WILLIS C. BRADLEY</b>			Docket No. <b>Q858-E</b>
Serial No. Not yet known	Filing Date Filed herewith	Examiner Not yet known	Group Art Unit Not yet known
Invention: <b>ADJUSTABLE HINGES FOR ORTHOPEDIC SPLINTS</b>			
I hereby certify that the following correspondence: <div style="border: 1px solid black; padding: 10px; margin: 10px 0;"><b>Declaration for Utility Patent Application w/Power of Attorney</b></div> <p style="text-align: center;"><i>(Identify type of correspondence)</i></p> <p>is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231</p> <p><u>September 18, 2000</u> <i>(Date)</i></p> <div style="text-align: right; margin-top: 20px;"><p><u>Carmen E. Hernandez</u> <i>(Typed or Printed Name of Person Mailing Correspondence)</i></p><p><u></u> <i>(Signature of Person Mailing Correspondence)</i></p><p><u>EL359148937US</u> <i>("Express Mail" Mailing Label Number)</i></p></div>			
<b>Note: Each paper must have its own certificate of mailing.</b>			

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**STATEMENT CLAIMING SMALL ENTITY STATUS  
(37 CFR 1.9(f) & 1.27(c))—SMALL BUSINESS CONCERN**

Docket Number (Optional)  
Q858-E

Applicant, Patentee, or Identifier: JOHN E. BENNETT and WILLIS C. BRADLEY

Application or Patent No.: \_\_\_\_\_

Filed or Issued: Filed herewith

Title: ADJUSTABLE HINGES FOR ORTHOPEDIC SPLINTS

I hereby state that I am

- ☐ the owner of the small business concern identified below:  
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN LENJOY ENGINEERING, INC.

ADDRESS OF SMALL BUSINESS CONCERN 13721 Gramercy Place, Gardena, California 90249-2469

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.  
☐ the application identified above.  
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization having any rights in the invention is listed below:

- ☐ no such person, concern, or organization exists.  
☐ each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING LEAH ROTTER

TITLE OF PERSON IF OTHER THAN OWNER President

ADDRESS OF PERSON SIGNING 13721 Gramercy Place, Gardena, CA 90249-2469

SIGNATURE

Leah Rotter

DATE

9/8/00

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**STATEMENT CLAIMING SMALL ENTITY STATUS  
(37 CFR 1.9(f) & 1.27(b))--INDEPENDENT INVENTOR**

Docket Number (Optional)  
Q858-E

Applicant, Patentee, or Identifier: JOHN E. BENNETT and WILLIS C. BRADLEY

Application or Patent No.: \_\_\_\_\_

Filed or Issued: Filed herewith

Title: ADJUSTABLE HINGES FOR ORTHOPEDIC SPLINTS

As a below named inventor, I hereby state that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:

- ☒ the specification filed herewith with title as listed above.  
☐ the application identified above.  
☐ the patent identified above.

I have not assigned, granted, conveyed, or licensed, and am under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☐ No such person, concern, or organization exists.  
☒ Each such person, concern, or organization is listed below.

LENJOY ENGINEERING, INC.  
13721 Gramercy Place  
Gardena, CA 90249-2469

Separate statements are required from each named person, concern, or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

JOHN E. BENNETT

NAME OF INVENTOR

*John E. Bennett*  
Signature of inventor

Date

9/6/00

WILLIS C. BRADLEY

NAME OF INVENTOR

*Willis C. Bradley*  
Signature of inventor

Date

9-6-2000

NAME OF INVENTOR

Signature of inventor

Date

## ADJUSTABLE HINGES FOR ORTHOPEDIC SPLINTS

### 5 Background of the Invention

#### Field of the Invention

10 This invention pertains to the field of hinged orthopedic splints and braces of the type applied across the joint of a limb such as a knee or elbow for limiting movement of the joint for therapeutic purposes, and is more particularly directed to certain improvements in the hinge for such splints.

#### Background of the Invention

15 Knee and elbow splints or braces typically have an upper plate and a lower plate connected to each other by a hinge such that, when the upper plate is attached to the limb above the joint and the lower plate to the limb below the joint, the patient may flex the limb at the joint. Many such splints are known and  
20 are commonly used in the course of orthopedic rehabilitation. It is also known to provide splints with adjustable hinges which enable a therapist to set limits to the arc of movement of the splint and hence of the patient's joint, as may be required by the patient's condition and the course of therapy. One general class of knee brace in current use has a detent movable on an upper plate into and out of  
25 engagement with a toothed or serrated edge on a lower plate. Within this class of splints there are two types. In the first type the toothed edge may be fixed on one plate so as to lock the two plates in a selectable relative angular relationship, i.e., the two plates are fixed at a desired angle selected from a range of possible angular relationships. Once so fixed the two plates are not movable and the  
30 patient cannot flex the joint while wearing the splint. In the second type of splint within this class one or more toothed edges are adjustable on one plate enabling

a variable range of movement to be set for the hinge. For example, two toothed elements are movable on the upper plate, such as two rotatable disks each with a toothed edge and a stop engageable by the lower plate. Angular movement of the lower plate relative to the upper plate is confined to an angular range defined by the relative positioning of the two stops, which in turn are adjustably set by rotation of the disks to the desired positions, and are fixed in that position by a common detent movable on the upper plate. In both types of splints the relative angular positioning of the two is set or limited by a detent movable on one plate and adjustably engagable with some structure mounted on the other plate.

A continuing problem encountered in this class of splints is to provide for convenient adjustment of the splint's angular settings by a therapist while also making the splint's settings relatively resistant to tampering by the patient who may become impatient with the course of therapy and wish to reset the splint to suit his or her immediate comfort.

A second shortcoming encountered in currently available knee or elbow braces of the aforementioned class is that the hinge settings are right or left handed, thereby limiting a particular splint to application on a limb of corresponding handedness. A continuing need exists for adjustable splints having ambidextrous hinge settings so that a given splint may be used interchangeably on either a right hand or left hand limb.

## Brief Summary of the Invention

The present invention addresses the aforementioned shortcomings by providing certain improvements in adjustable knee braces. These improvements include a tamper resistant hinge detent configured to discourage tampering by the patient with the hinge settings, a detent lockable in either a retracted or an engaged position to facilitate range setting by a therapist when locked in a

disengaged condition of the detent and before securing the detent when locked in its engaged position , and a bi-directional hinge to allow use of the splint on either left or right limbs.

5           In general, the improvements of this invention concern the class of orthopedic splints having an upper plate and a lower plate connected for pivotal movement, and a detent element supported on the upper plate and displaceable into and out of an engaged condition with a structure on the lower plate thereby to fix or limit relative angular movement between the two plates. The detent is  
10   spring biased towards its engaged condition and must be retracted out of engagement against the spring bias by manual effort applied by a therapist.

          In a first form the invention the toothed edge may be fixed to the lower plate in which case the splint is fixed at a selected angular relationship of the  
15   upper and lower plates. In a second form of the invention, two movable toothed edges are supported on the upper plate, such as on two wheels independently rotatable on the upper plate. Both wheels are locked against rotation relative to the upper plate by engagement with the detent, and the lower plate is free to pivot between two stops, one stop located on each wheel. The angular range of  
20   the plates is set by adjusting the angular spacing between the stops by rotation of the wheels while the detent is disengaged.

          In one improvement according to the present invention the splint has a cover assembly for protecting the detent element against displacement out of  
25   engagement by an unaided hand, and an aperture in the cover sized and disposed for admitting a pointed tool end into engagement with the detent for displacing the detent out of its engaged condition, so that tampering with the angular setting of the hinge by a patient wearing said orthopedic splint is discouraged.

In a presently preferred embodiment of the invention, the detent is displaceable in a guide way defined between the upper plate and the cover assembly, and a biasing spring is contained in the guide way. The spring may be a coil spring compressed between the cover assembly and the detent. The cover assembly may include a spacer which is mounted between the upper plate and cover plate and defining the guide way for the detent, and a cover plate applied over the spacer for containing the detent in the guide way. The access aperture may be a slot in the cover plate, the slot being aligned with a direction of displacement of the detent. The detent preferably has a tool end receptacle such as a hole or depression adapted to receive the pointed tool and thereby to facilitate positive engagement and displacement of the detent by means of the tool end. The access aperture is preferably sized and shaped so as to allow visual confirmation of detent engagement with the toothed element.

Typically, the detent is engageable with an arcuate toothed edge supported on the lower plate, and the pivotal movement of the two plates of the splint comprises an arc including a zero angle position situated at an intermediate location along the arc, such that the plates may be moved through substantial angular ranges on either side of the zero angle position. The zero angle position may be centered along the arc such that the plates may be pivoted through equal angular ranges on either side of the zero angle position. The zero angle position may be situated along the arc such that the two plates are aligned in a straight line when the hinge is set to the zero angle position. By providing for a range of angular movement of the hinge to one side or the other of the zero position, the splint may be applied to a right side or a left side of a limb, eliminating the need for special left handed or right handed splints. In another aspect of the invention the hinge has a locking element removably engageable for holding the detent out of its engaged condition to thereby facilitate application of the splint to a patient's limb with the hinge free to rotate through its full 240 degree arc of movement, so that the therapist can bend the splint quickly and easily to match the position of the patient's limb. That is, the splint angle can be



easily adjusted to the angle of the patient's joint rather than having to reposition the patient's limb to fit the angle of the splint. Once the splint is applied and fastened to the limb, the detent locking element facilitates setting of the hinge angular range by holding the detent out of engagement while the range setting elements or wheels are properly positioned, after which the detent may be released into engagement with the range setting elements.

The locking element may be in threaded engagement with the detent, such as a screw engageable in a threaded screw hole defined in the detent, such that an end of the screw bears against the upper plate in a tightened condition of the screw, or is advanced into a hole in the upper plate, thereby to hold the detent against the spring bias in a disengaged condition.

The structure engaged by the detent to fix or limit relative angular movement between the two plates may be a toothed edge fixed on the lower plate, such that the two plates are fixed in a selected angular relationship in an engaged condition of the detent. Alternatively, the structure engaged by the detent may be a range setting assembly adjustable for limiting pivotal movement between the two plates to a greater or lesser arc in an engaged condition of the detent. The range setting assembly may comprise a pair of wheels turning concentrically with the pivotal movement of the plates, each of the wheels having a wheel edge engageable by said detent for locking the wheel relative to the upper plate, and a stop on each of the wheels operative for limiting pivotal movement of the lower plate relative to the upper plate, and a pin or equivalent stop element on the lower plate being disposed between the two stops on the wheels such that the range of relative pivotal movement of the plates may be set by the angular spacing between the two stops when the detent is engaged for locking the wheels against rotation relative to the upper plate.

These and other improvements, features and advantages of this invention will be better understood by turning to the following description of the preferred embodiments taken in conjunction with the accompanying drawings.

5

### Brief Description of the Drawings

Figure 1 is a top plan view of a knee brace according to this invention applied to the outside of a knee joint of a patient's leg;

10

Figure 2 is an enlarged top plan view of an ambidextrous hinge according to this invention, with the upper and lower plates of the splint shown in straight line zero angle alignment;

15

Figure 3 is a cross-sectional view of the hinge taken along line 3-3 in Figure 2;

20

Figure 4 is a view taken along lines 4-4 in Figure 3 showing the interior of the hinge with the detent in engaged condition with the toothed edge of the lower plate, thereby locking the upper and lower plates against relative movement;

25

Figure 5 is a view as in Figure 4 showing the detent retracted against the bias spring to a disengaged position and depicting the angular range of movement of the lower plate between a solid lined position and a phantom lined position.

30

Figure 6 shows a second type of ambidextrous hinge for limiting the pivotal movement between the upper plate and the lower plate of the splint to an adjustable angular range, the hinge being shown with the cover plate removed to expose the detent in engaged condition to limit the range of movement between

solid and phantom lined positions of the lower plate on one side of a zero position of the hinge as indicated by angle A in the figure.

Figure 7 shows the ambidextrous hinge of Figure 6 set to a different angular range depicted by solid lined and phantom lined positions of the lower plate on the opposite side of the zero position of the hinge as indicated by angle B in the figure;

Figure 8 is a cross-sectional view showing the detent in engagement with the rotatable toothed wheels of the range setting assembly of the hinge and the detent locking screw threaded into the detent but disengaged from the upper plate; and

Figure 9 is a view as in Figure 8 but showing the detent in a retracted position compressing the biasing spring, and the detent locking screw passing through a hole in the upper plate and inserted into a hole in the lower plate to lock the detent in a retracted condition against the bias of the compressed spring.

#### Detailed Description of the Preferred Embodiments

With reference to the drawings wherein like elements are designated by like numerals, Fig.1 depicts an orthopedic splint or knee brace 10 applied to the knee joint K of a patient. The brace includes an upper plate 12 and a lower plate 14 connected to each other for pivotal movement by a hinge 16. The upper plate is attached to the thigh of the patient's leg by an upper strap S1 and the lower plate is similarly attached to the leg below the knee by a lower strap S2 so that the hinge 16 lies adjacent to and pivots with bending of the knee. Typically, two similar knee braces 10 are applied to the knee joint of the patient, one brace on the outside of the leg, as shown in Fig.1, and an opposite second brace (hidden in Fig.1) on the inside of the leg. The two braces are generally parallel to each

other and provide lateral support to the knee joint while allowing flexing of the knee joint in a plane parallel to the planes of movement of the brace hinge 16. In the course of rehabilitation or other therapy it may be desirable to temporarily hold the knee at a particular fixed angle or to limit the range of movement of the knee to a given angular range. For this purpose the hinge of this invention is provided with an adjustable detent mechanism which will be described below.

Figs. 2 through 5 illustrate a splint 10 of the first type with a hinge 16 which has a single toothed element fixed relative to one of the plates and engageable by the detent to fix the hinge and hence the plates 12, 14 at a selected angle within a range of angular movement of the hinge, and thereby immobilize the patient's leg at the selected angle. Figs. 6 through 9 illustrate a hinge 16' for splints of the second type where the hinge has two toothed elements, both of which are movable relative to either the upper or lower plate, and are both immobilized relative to one of the plates by engagement with the detent so that the hinge can be set either at a fixed angle between the two plates or to allow relative pivotal movement of the upper and lower plates over an arbitrary, adjustable angular range, so that the patient's leg wearing a splint equipped with hinge 16' may bend at the knee but over a range limited by a setting of hinge 16' chosen by the therapist. While not shown in the drawings, hinge 16' is part of a splint 10' which is similar to splint 10 in Fig.1 except that hinge 16' is substituted for hinge 16.

Figs. 2 and 3 depict in greater detail the hinge 16. As best seen in Fig. 3 the upper plate 12 carries a cover assembly which includes a cover plate 20 and a spacer 18. The lower plate is pivotably connected to the upper plate by means of a pivot rivet or screw 22 which secures the cover plate 20 and the upper plate 12 to opposite sides of a pivot sleeve 24. The lower plate turns about the pivot sleeve 24 and is held between first and second pairs of washers 26 which reduce friction and facilitate relative pivotal movement between the upper and lower plates. The cover plate 20 is fixed to the upper plate by a rivet 26a which also

passes through the spacer 18. The spacer 18 is further fastened to the upper plate by two additional rivets 26b,26c, seen in Fig.2, which pass through the cover plate, spacer and upper plate in a manner similar to rivet 26a.

5 A detent 30 is captive in a guide way 28 defined in the spacer 18 as best seen in Figs. 4 and 5. A bias spring 32 is compressed between the end 34 of the detent and the closed end 36 of the guide way 28. The cover plate 20, shown in Fig. 2 but removed in Figs. 4 and 5 for clarity of illustration, holds both the detent and the bias spring in the guide way 28. The bias spring continuously urges the  
10 detent towards engagement with a circularly curved toothed edge 40 at the end of the lower plate 14. The detent has a pointed end 38 which fits between any adjacent pair of teeth 42 of the toothed edge 40, thereby interlocking the upper and lower plates 12, 14 against relative pivotal movement about the pivot sleeve 24 and pivot rivet or screw 22. In this condition the upper and lower plates of the  
15 brace are fixed at a particular angle to each other, and the knee of a patient wearing the brace is similarly fixed at this angle.

The toothed edge 40 extends along a circular arc of about 240 degrees centered on a straight line which passes through the pivot center of the hinge  
20 and also through the pointed end 38 of the detent. When the detent is engaged with the center of the toothed edge 40 as in Fig. 4 the upper plate 12 and the lower plate 14 are aligned in a straight line with each other. By retracting the detent to the disengaged condition of Fig.5 the lower plate may be rotated 120 degrees left or 120 degrees right of the center or zero angle position of Fig.4, as  
25 depicted by the solid lined and phantom lined positions, respectively, of the lower plate 14 in Fig. 5. Returning to Fig.2, the top side of the cover plate 20 has a circularly curved edge 48 which is parallel to and overlies the toothed edge 40 of the lower plate. The edge 48 has a scale graduated in degrees of arc with a zero position at its center and graduations extending 120 degrees to each side of the  
30 zero position. A pointer 49 on the lower plate provides a reference for positioning the lower plate at a selected angle relative to the upper plate of the brace.

The brace of Figs. 2 through 5 is ambidextrous, i.e., it may be used interchangeably on either a left or a right hand limb of a patient without modification or adjustment to the hinge mechanism. This is because a knee joint naturally flexes from a straight or zero angle position through an arc of some 120 degrees to a fully bent condition of the leg. The hinge of this invention provides for arcs of angular movement of 120 degrees to either side of the zero position of the hinge. Consequently, the brace 10 with hinge 16 can be applied interchangeably to either the inside or outside of a leg, and to either a left leg or a right leg of a patient. The hinge 16 will naturally rotate along the angular range on the appropriate side of the zero position of the hinge 16 according to the direction of motion of the knee joint to which it is applied, without need for attention on the part of the therapist. As a result, substantial savings may be realized in the manufacture of splints and also in the time and level of skill required by therapies involving such splints.

Retraction of the detent 30 is accomplished by manually pushing or sliding the detent within the guide way 28 against the force of bias spring 32, compressing the bias spring as shown in Fig.5 until the pointed end 38 of the detent is withdrawn from between the teeth 42 of the toothed edge, thereby freeing the lower plate 14 for rotation relative to the upper plate 12 about the pivot sleeve 24.

An access aperture in the form of slot 44 is cut in the cover plate 20 over the guide way 28 and oriented in the direction of movement of the detent 30. The slot 44 admits a narrow or pointed tool end to be introduced into contact and engagement with the detent 30, for the purpose of displacing the detent away from its engaged condition when adjustment of the brace angle setting is required. The slot 44 is shaped and sized, for example sufficiently elongated to expose the end of the detent in its engaged position and thus permit visual confirmation that the pointed end of the detent is satisfactorily engaged between

the teeth of the toothed edge, as seen in Fig. 2. A receptacle in the form of a depression or hole 46 in detent 30 is aligned with access slot 44, as shown in Fig.2. The receptacle 46 receives the narrow end of the tool and facilitates positive engagement between the tool and the detent while displacing the detent out of engagement and against the force of the bias spring 32. The access slot 44 effectively prevents access to the detent by an unaided hand, i.e. a hand unaided by a sufficiently narrow ended tool capable of passing through the slot 44 into the guide way 28. The detent is therefore recessed out of easy reach under the cover plate 20 and is protected against displacement away from its engaged condition by a patient's unaided hand, thereby discouraging tampering with the angular setting of the hinge 16 by a patient wearing the splint 10. The width of slot 44 is not critical, so long as it is sufficiently narrow to keep a finger from contacting and moving the detent 30. A slot width of 3/16<sup>th</sup>s of an inch has been found satisfactory, and admits, for example, the pointed end T of a ball point pen or pencil, as shown in Fig. 3, or any other readily available implement which may be pressed into service by a therapist as a tool for adjusting the hinge angle setting of brace 10. Of course, in cases where tampering by the patient is not a concern, a post, pin, finger tab or equivalent structure extending above the cover plate 20 through slot 44 may be fitted in the receptacle 46 to provide a permanent or removable exteriorly accessible means for more conveniently moving the detent 30 out of engagement, such as screw 70 in Fig. 8. The screw 70 can be used by the therapist as a finger hold for pushing and disengaging the detent during splint installation. The screw 70 may then remain in place for subsequent detent engagement or disengagement, or it may be removed completely from the splint at the option of the therapist.

Turning now to Figs. 6 through 9, hinge 30' has a detent 30 and detent cover assembly 20,18 similar to those described above in connection with hinge 30 of Figs. 2-5. The hinge 30' differs from hinge 30 in that the fixed toothed edge 40 of hinge 30 is replaced by a range adjustment assembly which includes two toothed wheels 50a, 50b, both rotatable on pivot sleeve 24 and thus

concentrically with pivotal movement of the hinge. Each toothed wheel 50a,b has a circular toothed edge 52 a, 52b extending about 240 degrees of arc about the respective wheel. An adjustment tab 54a, 54b extends radially from an untoothed portion of each wheel. Each wheel also has an arcuate slot 56a, 56b extending approximately 120 degrees of arc from an inside end 58 situated on a diameter line bisecting the toothed edge 52a,b., to an outside end 62. This diameter line also bisects the tab 54a, 54b of the wheel. The arcuate slots on the two wheels extend in opposite directions from their inside end 58. In a centered condition of the two wheels 50a,50b the detent 30 is aligned with the center of the toothed edge 52a,52b, as shown for wheel 50a in Fig. 6, so that the toothed edge of the wheel extends 120 degrees to either side of this center or zero position. It should be noted that the adjustment tab 54a is diametrically opposite to the center of the toothed edge 52a and in the centered condition of the wheel 40a the tab is also aligned with the lower plate 14 of the brace 10'. The toothed edge 52b is hidden directly under the toothed edge 52a in Figs. 6 and 7 but is similar to edge 52a. The two wheels 50a, 50b are in fact interchangeable, and differ only in that one wheel is flipped over or turned upside down relative to the other on the pivot sleeve 24. Directional pointers L and R or similar directional indicia are provided on the tabs 54a, 54b in Figs. 6 and 7 to guide the therapist when adjusting the angular constraints of the hinge. The directional indicia point in opposite directions of rotation to provide quick and easy identification of the two tabs.

A stop pin 60 is fixed to the lower plate 14 along a center line of the plate and extends through both arcuate slots 56a, 56b. The angular extent of rotation of each wheel 50a, 50b is therefore limited by the angular extent of the corresponding slot 56a or 56b. The range of angular movement of the hinge 16' is determined by the relative positions of both wheels 50a, 50b and the resulting degree of overlap of the two slots 56a, 56b. As seen in Fig. 8 the thickness of the detent 30 is sufficient to concurrently engage both toothed edges 52a,b and thereby lock both wheels 50a,b against rotation. The plates 12, 14 can also be



locked at an angled position relative to each other by first placing the two plates at the desired angle, then turning the wheels 50a,b to superimpose the tabs 54a,b on the centerline of the lower plate thereby capturing the stop pin 60 between the ends 58 of the slots, and engaging the detent 30 to lock the wheels in this position. The hinge 16' may also be set for an arbitrary range of angular movement by positioning the two wheels such that the slots 56a, 56b overlap by the desired angular range between the slot ends 58, rotating the two wheels so as to position the overlapping slots 56a, 56b in the desired position relative to the upper plate 12 so as to set the desired maximum and minimum angles of the lower plate relative to the upper plate, and locking both wheels in this position by engaging the pointed end 38 of the detent with the toothed edges of both wheels. The minimum and maximum angles of rotation of the hinge may be read off the graduated scale 25 on cover 20 as indicated by the positions of tabs 54a, 54b relative to the scale. Arrow-type markings are situated on each tab to indicate their relative positioning to help avoid confusion on the part of the therapist.

Figs. 6 and 7 illustrate the ambidextrous capability of the hinge 16'. As explained in the preceding paragraph each toothed wheel 50a,b has a center position with a 120 degree angular range of the toothed edge on either side of the center position. Consequently the hinge 16' may be set for an arbitrary arc of movement of up to 120 degrees to either the left side or the right side of the center position. Fig. 6 depicts a setting of the wheels 50a,b defining a right side arc of movement between the solid lined and phantom lined positions of the lower plate 14 indicated by arrow A. Fig. 7 shows the wheels 50a,b set and locked for a left side arc of movement between the solid lined and phantom lined positions of the lower plate 14 indicated by arrow B. Figs. 6 and 7 show how the stop pin 60 travels within the overlapping portions of the arcuate slots 56a,b such that movement of the lower plate 14 is stopped at the opposite ends 58 of the overlapping arcuate slots. From the foregoing it will be understood that the splint 10' with hinge 16' is fully ambidextrous and may be applied interchangeably on

the inside or outside of the leg, and on either the left or right leg of the patient, to the same extent as the hinge 16 discussed in connection with Figs. 2-5.

Figs. 8 and 9 illustrate an optional feature of this invention, namely, a  
5 detent locking element in the form of screw 70 with a knurled knob 71 threaded into a through-hole 72 in detent 30. The detent locking screw 70 can be advanced to bear against the upper plate 12 with sufficient force to make a friction lock and hold the detent 30 in a retracted or engaged position. Optionally, a hole 74 may be provided in the upper plate 12 so that the threaded hole 72  
10 aligns with hole 74 when the detent is retracted to a disengaged condition, and the detent locking screw 70 can then be advanced into hole 74 to hold the detent in a retracted position, as depicted in Fig. 9. Either way, the detent locking element 70 conveniently holds detent 30 away from engagement with the toothed wheels 50a,b for easier application of the splint to a patient's limb, so that the  
15 splint can be quickly and easily bent to the angle of the patient's joint during fitting, and also to facilitate adjustment and positioning of the toothed wheels 50a,b, when setting the desired angular range of movement of the splint as described in the preceding paragraph.

20 Engagement of the detent locking screw 70 in hole 74 relieves the therapist from having to hold the detent against the urging of the bias spring 32 and frees both of his or her hands for the task of fitting the splint on the patient's limb with the detent retracted. This is desirable during installation of the splint so as to permit free movement of the hinge in order to match the angle of the splint  
25 plates to the position of the patient's joint being fitted with the splint. The angular adjustments of the hinge are more conveniently set after the splint is fitted to the patient's limb. The locking screw can also be subsequently used to secure the detent in engaged condition, if desired.

30 From the foregoing it will be appreciated that several advantages and improvements over previously known knee braces and splint have been

disclosed. Although preferred embodiments have been described and illustrated for purposes of clarity and example it must be understood that many changes, modifications and substitutions will be apparent to those having only ordinary skill in this art without thereby departing from the scope of the invention as defined by  
5 the following claims.

What is claimed as new and unobvious is:

///

///

10

## CLAIMS

1. A hinge for an orthopedic splint comprising:

5            an upper plate and a lower plate connected for pivotal movement, a detent  
element supported on said upper plate and displaceable into and out of an  
engaged condition thereby to lock the two plates against said pivotal movement  
in a selected angular relationship relative to each other, a spring normally urging  
said detent into said engagement, cover means protecting said detent element  
10           against displacement out of said engagement by an unaided hand, and an  
aperture in said cover sized and disposed for admitting a tool end operative for  
displacing said detent out of said engagement against said urging of said spring  
and thus to free the plates for said pivotal movement, whereby tampering with  
the angular setting of said hinge by a patient wearing said orthopedic splint is  
15           discouraged.

2. The hinge of Claim 1 wherein said detent is displaceable in a guide way  
defined between said upper plate and said cover means.

3. The hinge of Claim 2 wherein said spring is contained in said guide way.

4. The hinge of Claim 3 wherein said spring is a coil spring compressed between  
said spacer and said detent.

5. The hinge of Claim 1 wherein said detent is engageable with a toothed edge  
on said lower plate.

6. The hinge of Claim 1 wherein said aperture is a slot aligned with a direction of  
displacement of said detent, said slot being sized and dimensioned to allow  
30           visual confirmation of engagement of said detent with said toothed edge.

7. The hinge of Claim 1 wherein said detent has a tool end receptacle adapted to receive the said tool end thereby to facilitate displacement of said detent by means of a said tool end.

5 8. The hinge of Claim 1 wherein said pivotal movement comprises an arc including a zero angle position at an intermediate location along said arc, such that said plates may be moved through substantial angular ranges on either side of said zero angle position.

10 9. The hinge of Claim 8 wherein said zero angle position is centered along said arc such that said plates may be pivoted through equal angular ranges on either side of said zero angle position.

15 10. The hinge of Claim 9 wherein said plates are aligned in a straight line in said zero angle position.

20 11. The hinge of Claim 1 further comprising a locking element removably engageable with said detent for holding said detent out of said engagement thereby to facilitate adjustment of the plates to a desired angular relationship.

12. The hinge of Claim 11 wherein said locking element is threaded for engagement with said detent.

25 13. The hinge of Claim 12 wherein said locking element is a screw engageable in a threaded screw hole defined in said detent, such that an end of said screw bears against said upper plate or engages with a hole in the upper plate thereby to hold said detent against said urging of said spring.

30 14. The hinge of Claim 1 further comprising range setting means engageable by said detent, said range setting means being adjustable for limiting said pivotal movement to a greater or lesser arc in a disengaged condition of said detent.

15. The hinge of Claim 14 wherein said range setting means comprises a pair of wheels turning concentrically with said pivotal movement of the plates, each of said wheels having a wheel edge engageable by said detent for locking the wheel relative to said upper plate, and a stop on each of said wheels operative for limiting pivotal movement of said lower plate relative to said upper plate in one direction of movement, a stop pin on said lower plate being disposed between the two stops such that the range of pivotal movement between the plates may be set by the angular spacing between the two stops when said detent is engaged for locking said wheels against rotation relative to said upper plate.

16. The hinge of Claim 1 further comprising directional markings in said tabs as a visual indicator for assisting a therapist in determining the relative positions of the tabs during adjustment of the hinge.

17. The hinge of Claim 1 wherein said cover includes a spacer mounted to said upper plate and defining a guide way for said detent and a cover plate for containing said detent in said guide way.

18. A hinge for an orthopedic splint comprising:

an upper plate and a lower plate connected for pivotal movement, a detent element supported on said upper plate and displaceable into and out of an engaged condition thereby to lock the two plates against said pivotal movement in a selected angular relationship relative to each other, a spring normally urging said detent into said engagement, wherein said pivotal movement comprises an arc including a zero angle position at an intermediate location along said arc, such that said plates may be moved through substantial angular ranges on either side of said zero angle position.

19. The hinge of Claim 18 wherein said zero angle position is centered along said arc such that said plates may be pivoted through equal angular ranges on either side of said zero angle position.

5 20. The hinge of Claim 19 wherein said plates are aligned in a straight line in said zero angle position.

10 21. The hinge of Claim 18 further comprising cover means protecting said detent element against displacement out of said engagement by an unaided hand, and an aperture in said cover sized and disposed for admitting a tool end operative for displacing said detent out of said engagement against said urging of said spring and thus to free the plates for said pivotal movement, whereby tampering with the angular setting of said hinge by a patient wearing said orthopedic splint is discouraged.

15 22. A hinge for an orthopedic splint comprising:  
an upper plate and a lower plate connected for pivotal movement, a detent element supported on said upper plate and displaceable into and out of an engaged condition thereby to lock the two plates against said pivotal movement  
20 in a selected angular relationship relative to each other, a spring normally urging said detent into said engagement, and a locking element removably engageable with said detent for holding said detent out of said engagement thereby to facilitate adjustment of the plates to a desired angular relationship.

25 23. The hinge of Claim 22 wherein said locking element is threaded for engagement with said detent.

30 24. The hinge of Claim 23 wherein said locking element is a screw engageable in a threaded screw hole defined in said detent, such that said screw engages said upper plate thereby to hold said detent in a disengaged condition against said urging of said spring.

25. The hinge of Claim 24 wherein said screw is removable from the splint thereby to discourage tampering with the detent or may be left in place and tightened to secure said detent in said engaged condition.

5

26. A hinge for an orthopedic splint comprising:




an upper plate and a lower plate connected for pivotal movement, a detent element supported on said upper plate and displaceable into and out of an engaged condition thereby to lock the two plates against said pivotal movement in a selected angular relationship relative to each other, a spring normally urging said detent into said engagement, a pair of wheels turning concentrically with said pivotal movement of the plates, each of said wheels having a wheel edge engageable by said detent for locking the wheel relative to said upper plate, and a stop on each of said wheels operative for limiting pivotal movement of said lower plate relative to said upper plate in one direction of movement, said pin on lower plate being disposed between the two stops such that the range of pivotal movement between the plates may be set by the angular spacing between the two stops when said detent is engaged for locking said wheels against rotation relative to said upper plate.



10



15



20



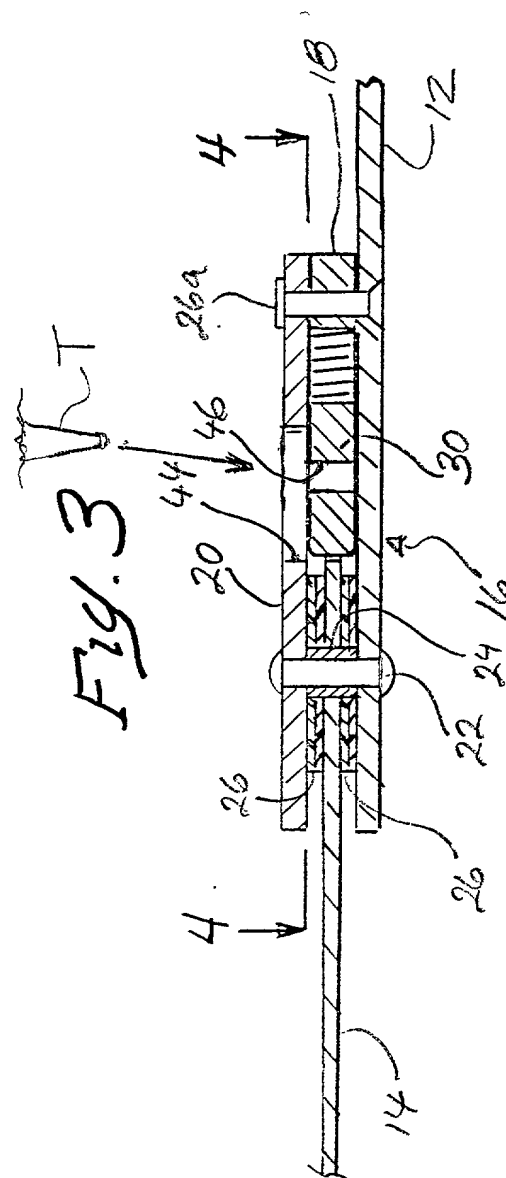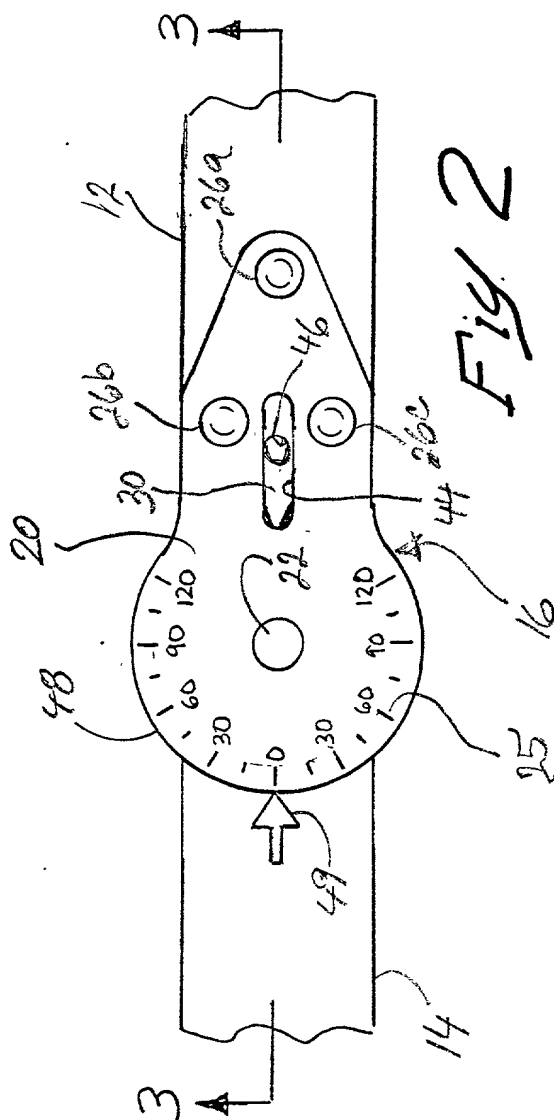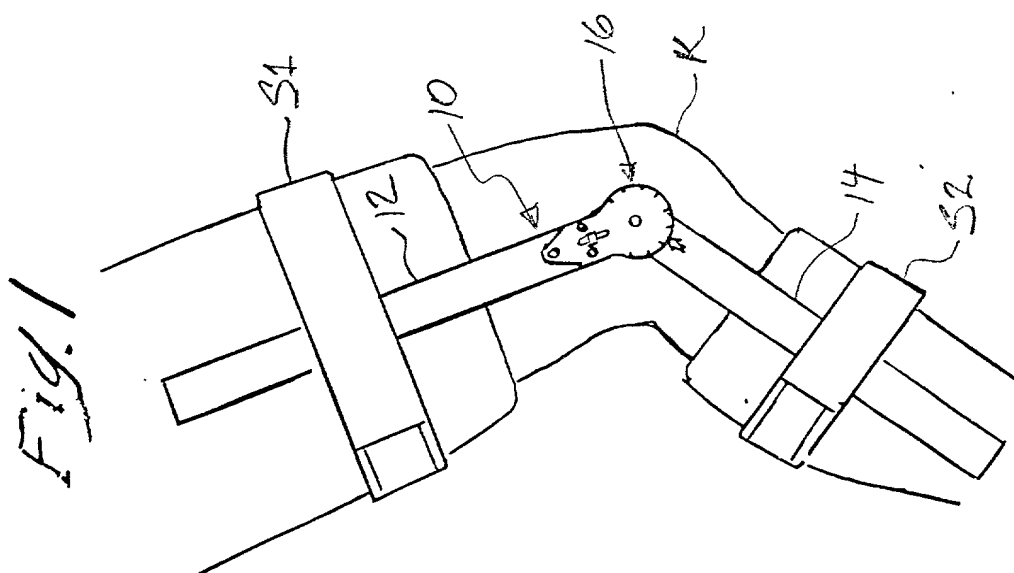

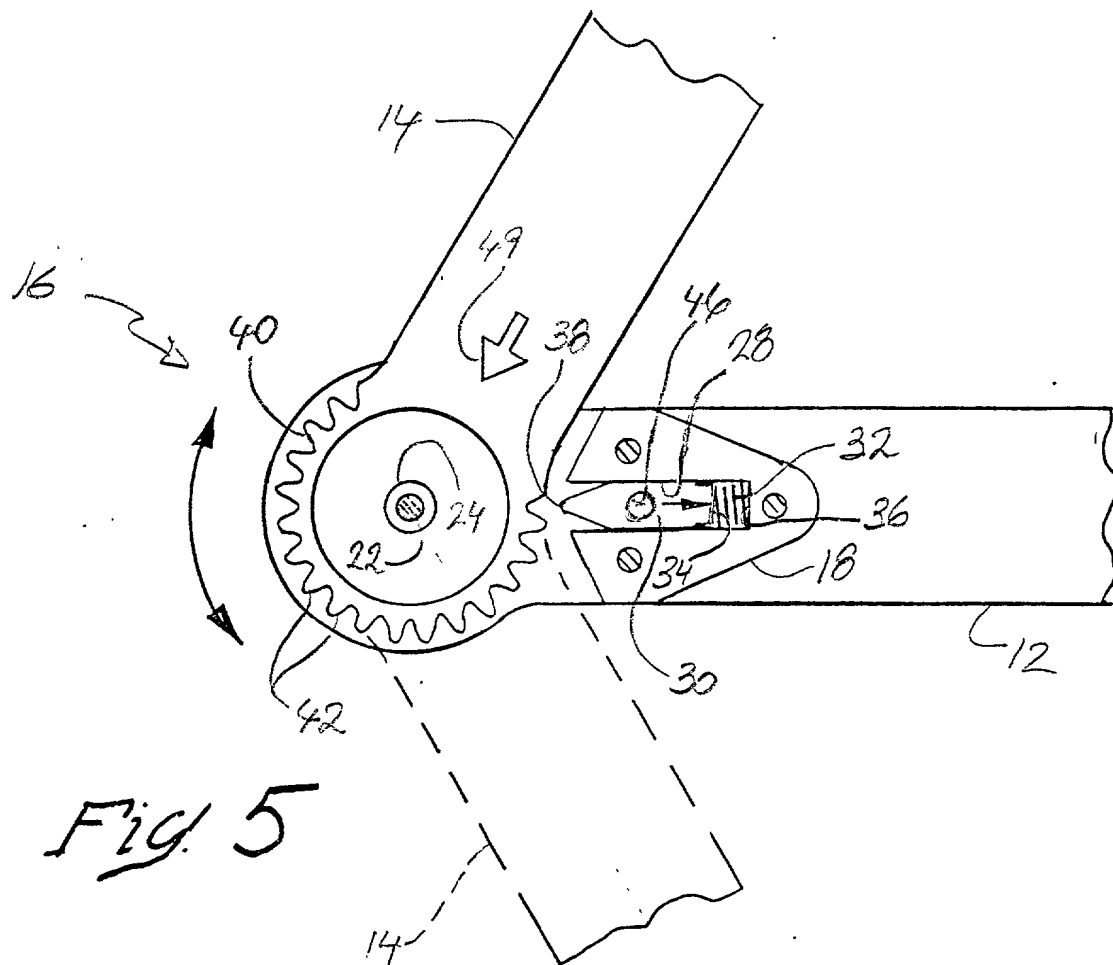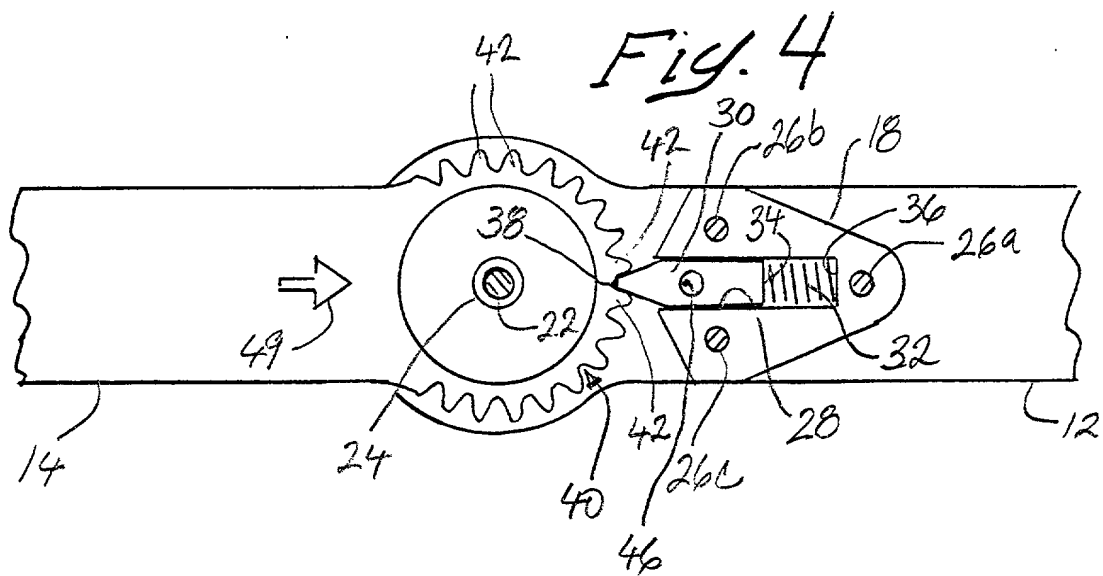

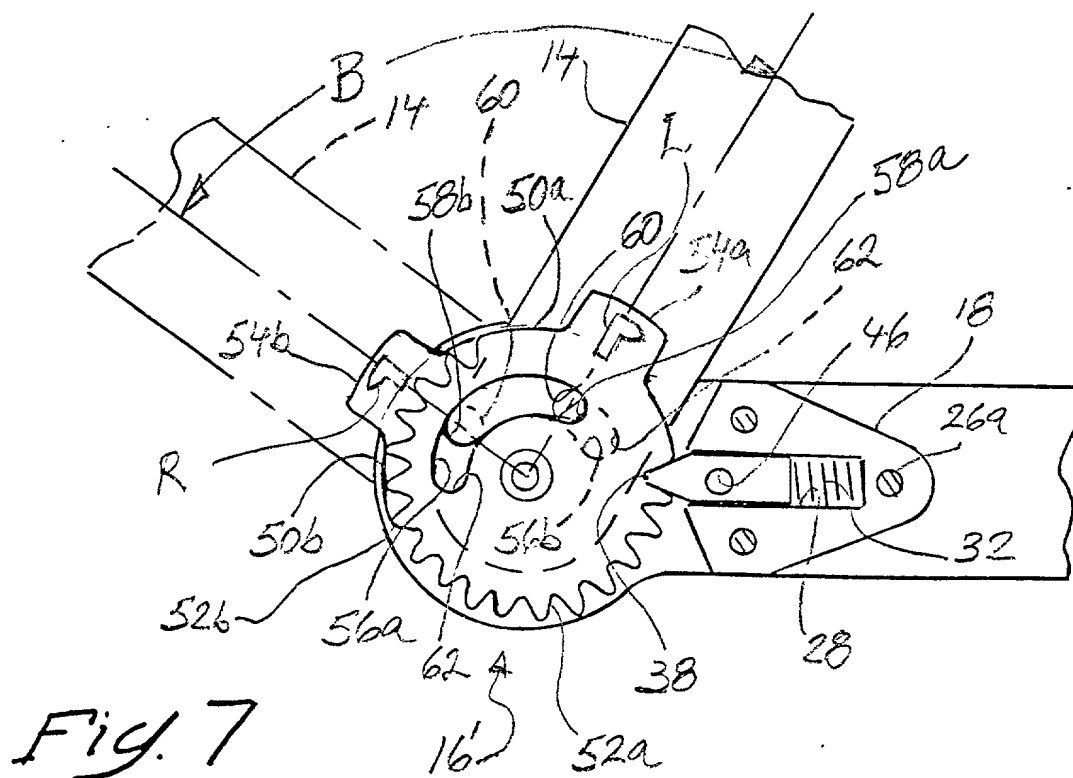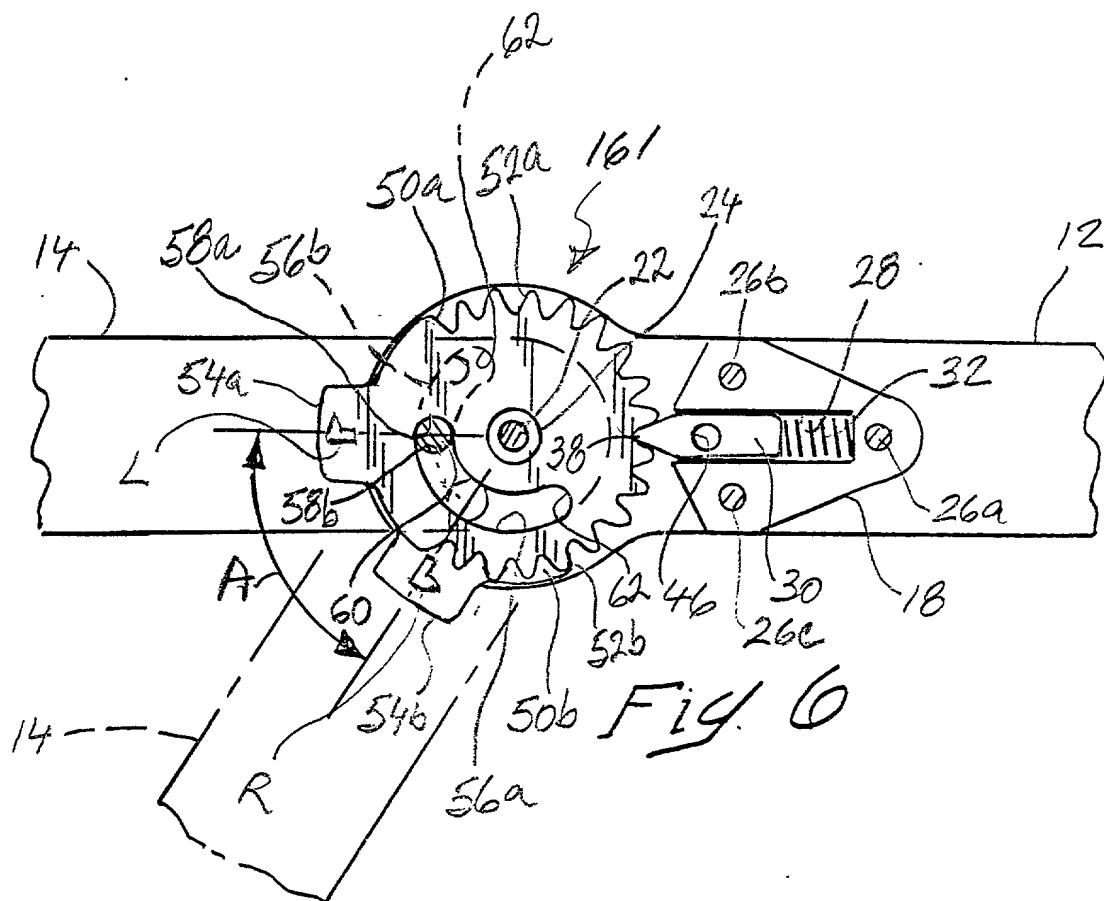

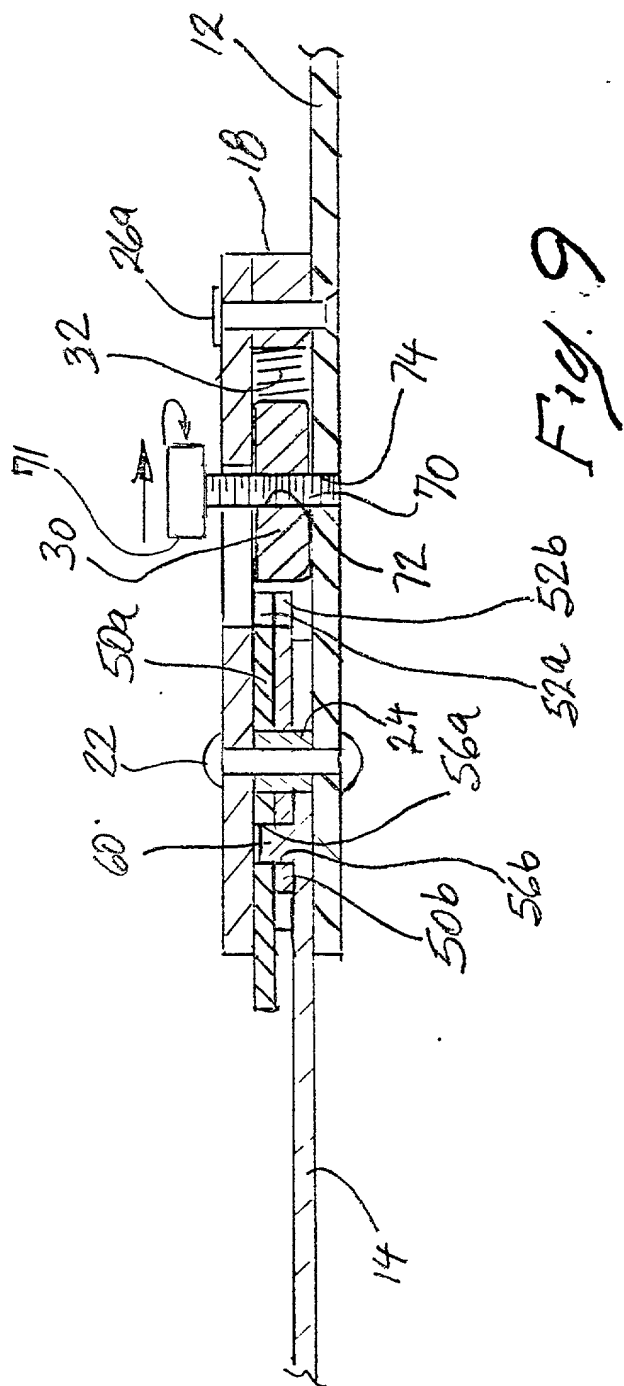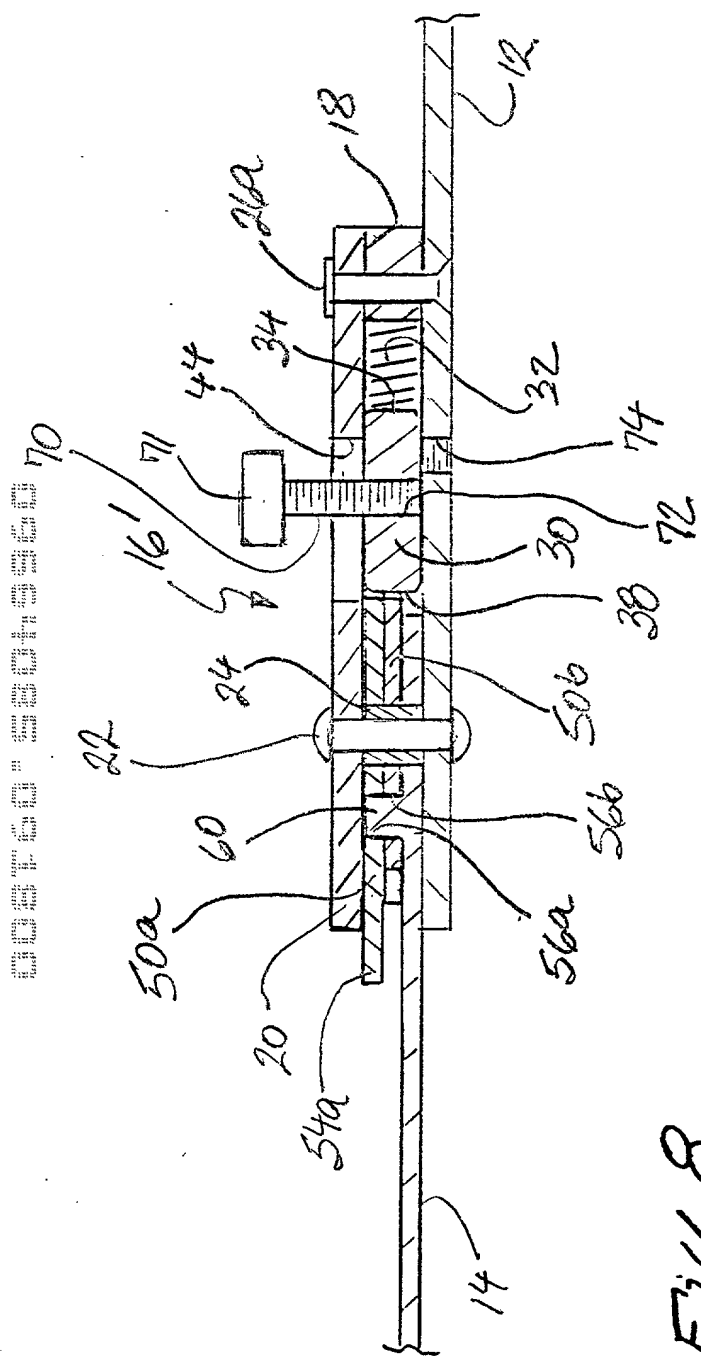

Please type a plus sign (+) inside this box ➡

PTO/SB/01 (12-97)  
Approved for use through 9/30/00. OMB 0851-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

<b>DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)</b>	<b>Attorney Docket Number</b>	Q858-E
	<b>First Named Inventor</b>	Bennett et al.
	<b>COMPLETE IF KNOWN</b>	
	<b>Application Number</b>	
	<b>Filing Date</b>	Filed herewith
	<b>Group Art Unit</b>	
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing	OR	<input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)
	<b>Examiner Name</b>	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

ADJUSTABLE HINGES FOR ORTHOPEDIC SPLINTS

the specification of which (Title of the Invention)

☒ is attached hereto  
OR  
☐ was filed on (MM/DD/YYYY)  as United States Application Number or PCT International

Application Number  and was amended on (MM/DD/YYYY)  (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
None			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)
None	

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

**Burden Hour Statement:** This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. **DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO:** Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)  
Approved for use through 9/30/00. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

## DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U. S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
None		

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☒ Customer Number

IDON307074

OR

☐ Registered practitioner(s) name/registration number listed below

Place Customer  
Number Bar Code  
Label here

Name	Registration Number	Name	Registration Number
William H. Pavitt, Jr.	16,290	Natan Epstein	28,997
Robert Jacobs	33,403	David A. Belasco	41,609
Todd B. Serota	31,421		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to:


☒ Customer Number or  
Bar Code Label

IDON307074

OR ☒ Correspondence address below

Name	Natan Epstein				
Address	BEEHLER & PAVITT				
Address	100 Corporate Pointe, Suite 330				
City	Culver City	State	CA	ZIP	90230
Country	U.S.A.	Telephone	(310) 215-3183	Fax	(310) 215-3248

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

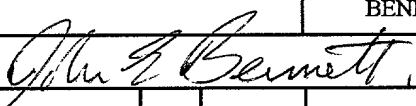Name of Sole or First Inventor:	<input type="checkbox"/> A petition has been filed for this unsigned inventor						
Given Name (first and middle [if any])			Family Name or Surname				
JOHN E.			BENNETT				
Inventor's Signature					Date	9/6/00	
Residence: City	Rancho Palos Verdes	State	CA	Country	U.S.A.	Citizenship	U.S.A.
Post Office Address	5905 Clint Place						
Post Office Address	Rancho Palos Verdes, CA 90275						
City	see above	State	CA	ZIP	90275	Country	U.S.A.

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box ➡ +

PTO/SB/02A (3-97)

Approved for use through 9/30/98. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

## DECLARATION

ADDITIONAL INVENTOR(S)  
Supplemental Sheet  
Page 1 of 1

<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
WILLIS C.				BRADLEY			
Inventor's Signature	<i>Willis C Bradley</i>			Date	<i>11-2000</i>		
Residence: City	Gardena	State	CA	Country	U.S.A.	Citizenship	U.S.A.
Post Office Address	1226 West 163rd Street						
Post Office Address							
City	Gardena	State	CA	ZIP	90247	Country	U.S.A.
<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
N/A							
Inventor's Signature				Date			
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	
<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
N/A							
Inventor's Signature				Date			
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.